



**Huawei**

**AP7030DE**

**Access Point**

Datasheet



## Product Overview

Huawei AP7030DE is the latest-generation technology-leading wireless access point (AP). It provides secure gigabit wireless access in compliance with the latest 802.11ac Wave 1 standards. The AP supports 3 x 3 MIMO and three spatial streams and provides a rate of up to 1.9 Gbit/s. With 12 built-in dual-band combined smart antennas, the AP enables smooth evolution from 802.11n standards to 802.11ac standards and meets the bandwidth requirements of large-bandwidth services such as High Definition (HD) video streams, multimedia, and desktop cloud services, delivering smooth and high-quality wireless services to enterprise users. With industry-leading capabilities in terms of signal coverage, access density, and operation stability, the AP provides high-quality mobile cloud access services to help customers build the optimal wireless network. As the industry's first AP that uses smart antenna technology, it is more intelligent, secure, and easier to use. The AP7030DE delivers industry-leading performance in a rugged, attractive enclosure and is ideal for medium and large high-density scenarios, such as schools, government offices, exhibition centers, stadiums, stations, and large venues.



AP7030DE

## Feature Overview

- 802.11ac Wave 1 standards compliance, delivering services simultaneously on 2.4G and 5G radios; 600 Mbit/s at 2.4 GHz; 1.3 Gbit/s at 5 GHz; and 1.9 Gbit/s for the device
- Smart antenna array technology enables targeted signal coverage for mobile terminals, reduces interferences, and improves signal quality. Additionally, it implements millisecond-level switchover as terminals move.
- Dual Ethernet interfaces support link aggregation and traffic load balancing to ensure link reliability.

## Feature Description

### 802.11ac GE access

The AP supports the 80-MHz bandwidth mode. Frequency bandwidth increase brings extended channels and more sub-carriers for data transmission, and a 2.16 times higher rate. High Quadrature Amplitude Modulation (HQAM) at 256-QAM increases the 5 GHz radio rate to 1.3 Gbit/s. The throughput of 802.11ac AP is twice that of traditional APs.

### Smart antenna array technology

The AP integrates smart antenna and implicit beamforming technologies and makes use of 12 dual-band smart antennas to implement more precise user detection, suppress interference, and improve signal quality, enabling users to have a seamless, smooth wireless network experience.

- High Density Boost technology

Huawei uses the following technologies to address challenges in high-density scenarios, including access problems, data congestion, and poor roaming experience:

- Interference suppression

Huawei's Clear Channel Assessment (CCA) optimization technology reduces the possibility of air port resources shared by multiple devices, allows higher user access, and improves the throughput.

- Air port performance optimization

In high-density scenarios where many users access the network, the increased number of low-rate STAs consumes more resources on the air port, reduces the AP capacity, and lowers user experience. Therefore, Huawei APs will check the signal strength of STAs during access and reject access from weak-signal STAs. At the same time, the APs monitor the rate of online STAs in real time and forcibly disconnect low-rate STAs so that the STAs can reassociate with APs that have stronger signals. Terminal access control technology can increase air port use efficiency and allow access from more users.

- 5G-prior access

The APs support both 2.4G and 5G frequency bands. The 5G-prior access function enables an AP to steer STAs to the 5 GHz frequency band first, which reduces load and interference on the 2.4 GHz frequency band, improving user experience.

- Load balancing between APs

After the load balancing function is enabled, the AC distributes users evenly to APs based on user quantity and traffic volume. Traffic load is therefore balanced among APs to ensure stable AP performance.

- Smart roaming

Smart roaming technology is based on the 802.11k and 802.11v technologies and allows STAs to connect to APs with stronger signals, improving user experience and the overall performance of the wireless network.

- Wired and wireless dual security guarantee

To ensure data security, Huawei APs integrate wired and wireless security measures and provide comprehensive security protection.

- Authentication and encryption for wireless access

The APs support WEP, WPA/WPA2-PSK, WPA/WPA2-802.1x, and WAPI authentication/encryption modes to ensure security of the wireless network. The authentication mechanism is used to authenticate user identities so that only authorized users can access network resources. The encryption mechanism is used to encrypt data transmitted over wireless links to ensure that the data can only be received and parsed by expected users.

- Analysis on non-Wi-Fi interference sources

Huawei APs can analyze the spectrum of non-Wi-Fi interference sources and identify them, including baby monitors, Bluetooth devices, digital cordless phones (at 2.4 GHz frequency band only), wireless audio transmitters (at both the 2.4 GHz and 5 GHz frequency bands), wireless game controllers, and microwave ovens. Coupled with Huawei eSight, the precise locations of the interference sources can be detected, and the spectrum of them displayed, enabling the administrator to remove the interference in a timely manner.

- Rogue device monitoring

Huawei APs support WIDS/WIPS, and can monitor, identify, defend, counter, and perform refined management on the rogue devices, to provide security guarantees for air interface environment and wireless data transmission.

- AP access authentication and encryption

The AP access control ensures validity of APs. The CAPWAP link protection and DTLS encryption provide security assurance, improving data transmission security between the AP and the AC.

- Automatic radio calibration

Automatic radio calibration allows an AP to collect signal strength and channel parameters of surrounding APs and generate AP topology according to the collected data. Based on interference from authorized APs, rogue APs, and non-Wi-Fi interference sources, each AP automatically adjusts its transmit power and working channel to make the network operate at the optimal performance. In this way, network reliability and user experience are improved.

- Automatic application identification

Huawei APs support smart application control technology and can implement visualized control on Layer 4 to Layer 7 applications.

- Traffic identification

Coupled with Huawei ACs, the APs can identify over 800 common applications in various office scenarios. Based on the identification results, policy control can be implemented on user services, including priority adjustment, scheduling, blocking, and rate limiting to ensure efficient bandwidth resource use and improve quality of key services.

- Traffic statistics collection

Traffic statistics of each application can be collected globally, by SSID, or by user, enabling the network administrator to know application use status on the network. The network administrator or operator can implement visualized control on service applications on smart terminals to enhance security and ensure effective bandwidth control.

## Basic Specifications..... //

### Hardware specifications

	Item	Description
Technical specifications	Dimensions (H x W x D)	53 mm x 220 mm x 220 mm
	Weight	1.1 kg
	Interface type	<ul style="list-style-type: none"> <li>2 x 10/100/1000M self-adaptive Ethernet interface (RJ45)</li> <li>1 x Management console port (RJ45)</li> </ul>
	LED indicator	Indicates the power-on, startup, running, alarm, and fault status of the system.
Power specifications	Power input	<ul style="list-style-type: none"> <li>12 V DC <math>\pm</math> 10%</li> <li>PoE power supply: -48 V DC (in compliance with IEEE 802.3at)</li> </ul>
	Maximum power consumption	19 W NOTE: The actual maximum power consumption depends on local laws and regulations.

	Item	Description
Environmental specifications	Operating temperature	-20°C to +50°C
	Storage temperature	-40°C to +70°C
	Operating humidity	5% to 95% (non-condensing)
	Dustproof and waterproof grade	IP41
	Altitude	-60 m to +5000 m
	Atmospheric pressure	70 kPa to 106 kPa
Radio specifications	Antenna type	Twelve built-in dual-band combined smart antennas
	Antenna gain	5 dBi (2.4 GHz); 5 dBi (5 GHz)
	Maximum number of VAPs for each radio	16
	Maximum number of users	≤ 256
	Maximum transmit power	2.4G: 25dBm(combined power); 5G: 21dBm(combined power) NOTE: The actual transmit power depends on local laws and regulations.
	Power increment	1 dBm
	Receiver sensitivity	2.4 GHz 802.11b (CCK): -91 dBm @ 1 Mb/s; -84 dBm @ 11 Mb/s
		2.4 GHz 802.11g (non-HT20): -87 dBm @ 6 Mb/s; -69 dBm @ 54 Mb/s
		2.4 GHz 802.11n (HT20): -86 dBm @ MCS0; -66 dBm @ MCS7
		2.4 GHz 802.11n (HT40): -83 dBm @ MCS0; -63 dBm @ MCS7
		5 GHz 802.11a (non-HT20): -87 dBm @ 6 Mb/s; -68 dBm @ 54 Mb/s
		5 GHz 802.11n (HT20): -85 dBm @ MCS0; -67 dBm @ MCS7
		5 GHz 802.11n (HT40): -82 dBm @ MCS0; -64 dBm @ MCS7
		5 GHz 802.11ac (VTH20): -85 dBm @ MCS0NSS1; -62 dBm @ MCS8NSS1
		5 GHz 802.11ac (VTH40): -82 dBm @ MCS0NSS1; -57 dBm @ MCS9NSS1
5 GHz 802.11ac (VTH80): -79 dBm @ MCS0NSS1; -54 dBm @ MCS9NSS1		

## Software specifications

Item	Description
WLAN features	<ul style="list-style-type: none"> <li>Compliance with IEEE 802.11a/b/g/n/ac</li> <li>Maximum rate: 1.9 Gbit/s</li> <li>Maximum Ratio Combining (MRC)</li> <li>Cyclic Delay Diversity (CDD)/Cyclic Shift Diversity (CSD)</li> <li>Maximum Likelihood Detection (MLD)</li> <li>Data unit aggregation, including A-MPDU (Tx/Rx) and A-MSDU (Rx only)</li> <li>802.11 Dynamic Frequency Selection (DFS)</li> <li>Short Guard Interval (GI) in 20 MHz, 40 MHz, and 80 MHz modes</li> <li>Priority mapping and packet scheduling based on a Wi-Fi Multimedia (WMM) profile to implement priority-based data processing and forwarding</li> <li>Automatic and manual rate adjustment (the rate is adjusted automatically by default)</li> <li>WLAN channel management and channel rate adjustment</li> <li>Automatic channel scanning and interference avoidance</li> <li>Service Set Identifier (SSID) hiding, support for SSIDs in Chinese</li> <li>Signal Sustain Technology (SST)</li> <li>Unscheduled Automatic Power Save Delivery (U-APSD)</li> <li>Control and Provisioning of Wireless Access Points (CAPWAP)</li> <li>Automatic access</li> <li>Hotspot2.0</li> <li>802.11k and 802.11v smart roaming</li> <li>Fast roaming (<math>\leq 50</math> ms)</li> </ul>
Network features	<ul style="list-style-type: none"> <li>Compliance with IEEE 802.3u</li> <li>Auto-negotiation of the rate and duplex mode; automatic switchover between the Media Dependent Interface (MDI) and Media Dependent Interface Crossover (MDI-X)</li> <li>SSID-based VLAN assignment</li> <li>VLAN trunk on uplink Ethernet ports</li> <li>4094 VLAN IDs (1 to 4094) and a maximum of 16 virtual APs (VAPs) for each radio</li> <li>AP control channel in tagged and untagged mixed mode</li> <li>DHCP client, obtaining IP addresses through DHCP</li> <li>Tunnel forwarding and direct forwarding</li> <li>STA isolation in the same VLAN</li> <li>Multicast Domain Name Service (mDNS) gateway protocol: supports AirPlay and AirPrint service sharing between users of different VLANs</li> <li>Access control lists (ACLs)</li> <li>Link Layer Discovery Protocol (LLDP)</li> <li>Service holding upon CAPWAP link disconnection</li> <li>Unified authentication on the AC</li> <li>AC dual-link backup</li> <li>Soft Generic Routing Encapsulation (GRE)</li> <li>IPv6 Portal</li> <li>IPv6 Source Address Validation Improvements (SAVI)</li> <li>IPv4/IPv6 ACL</li> </ul>


Item	Description
QoS features	<p>Priority mapping and packet scheduling based on a WMM profile to implement priority-based data processing and forwarding</p> <p>WMM parameter management for each radio</p> <p>WMM power saving</p> <p>Priority mapping for upstream packets and flow-based mapping for downstream packets</p> <p>Queue mapping and scheduling</p> <p>User-based bandwidth limiting</p> <p>Adaptive bandwidth management (the system dynamically adjusts bandwidth based on the number of users and radio environment to improve user experience)</p> <p>Airtime scheduling</p> <p>Support for Microsoft Lync APIs and high voice call quality through Lync API identification and scheduling</p>
Security features	<p>Open system authentication</p> <p>WEP authentication/encryption</p> <p>WPA/WPA2-PSK authentication and encryption</p> <p>WPA/WPA2-802.1x authentication and encryption</p> <p>WPA-WPA2 authentication</p> <p>WAPI authentication and encryption</p> <p>WIDS including rogue AP and STA detection, attack detection, STA/AP blacklist and whitelist</p> <p>802.1x authentication, MAC address authentication, and Portal authentication</p> <p>802.11w Protected Management Frames (PMFs)</p>
Maintenance features	<p>Unified management and maintenance on the AC</p> <p>Plug-and-Play (PnP): automatic ally going online and loading configurations</p> <p>Batch upgrade</p> <p>Local AP management through the serial port or using Telnet</p> <p>Real-time configuration monitoring and fast fault location using the NMS</p> <p>System status alarm</p> <p>STelnet using Secure Shell (SSH) v2</p> <p>Secure File Transfer Protocol (SFTP) using SSH v2</p>
BYOD	<p>Identifies the device type according to the Organizationally Unique Identifier (OUI) in the MAC address.</p> <p>Identifies the device type according to the User Agent (UA) information in an HTTP packet</p> <p>Identifies the device type according to DHCP options.</p> <p>The RADIUS server delivers packet forwarding, security, and QoS policies according to the device type carried in the RADIUS authentication and accounting packets.</p>
Location service	<p>Locates tags manufactured by AeroScout or Ekahau.</p> <p>Locates Wi-Fi terminals.</p>
Spectrum analysis	<p>Identifies interference sources such as baby monitors, Bluetooth devices, digital cordless phones (at 2.4 GHz frequency band only), wireless audio transmitters (at both the 2.4 GHz and 5 GHz frequency bands), wireless game controllers, and microwave ovens.</p> <p>Works with Huawei eSight to locate and perform spectrum analysis on interference sources.</p>

### Standards compliance


Item	Description
Safety standards	UL 60950-1 CAN/CSA 22.2 No.60950-1 IEC 60950-1 EN 60950-1 GB 4943
Radio standards	ETSI EN 300 328 ETSI EN 301 893 FCC Part 15C: 15.247 FCC Part 15C: 15.407 RSS-210 AS/NZS 4268 FCC Part 15.107 and 15.109
EMC standards	EN 301 489-1 EN 301 489-17 ETSI EN 60601-1-2 FCC Part 15 ICES-003 YD/T 1312.2-2004 ITU k.21 GB 9254 GB 17625.1 AS/NZS CIPSR22 EN 55022 EN 55024 CISPR 22 CISPR 24 IEC61000-4-6 IEC61000-4-2

Item	Description
IEEE standards	IEEE 802.11a/b/g IEEE 802.11n IEEE 802.11ac IEEE 802.11h IEEE 802.11d IEEE 802.11e IEEE 802.11k IEEE 802.11u IEEE 802.11v IEEE 802.11w
Security standards	802.11i, Wi-Fi Protected Access 2 (WPA2), WPA 802.1x Advanced Encryption Standards (AES), Temporal Key Integrity Protocol (TKIP), and Extensible Authentication Protocol (EAP) types: <ul style="list-style-type: none"> <li>• EAP-Transport Layer Security (TLS)</li> <li>• EAP-Tunneled TLS (TTLS) or Microsoft Challenge Handshake Authentication Protocol Version 2 (MSCHAPv2)</li> <li>• Protected EAP (PEAP) v0 or EAP-MSCHAPv2</li> <li>• EAP-Flexible Authentication via Secure Tunneling (FAST)</li> <li>• PEAP v1 or EAP-Generic Token Card (GTC)</li> <li>• EAP-Subscriber Identity Module (SIM)</li> </ul>
Environmental standards	ETSI 300 019-2-1 ETSI 300 019-2-2 ETSI 300 019-2-3 ETSI 300 019-1-1 ETSI 300 019-1-2 ETSI 300 019-1-3
EMF	CENELEC EN 62311 CENELEC EN 50385 OET65 RSS-102 FCC Part1&2 FCC KDB series
RoHS	Directive 2002/95/EC & 2011/65/EU
Reach	Regulation 1907/2006/EC
WEEE	Directive 2002/96/EC & 2012/19/EU
Certifications	Wi-Fi Alliance (WFA) certified 802.11a/b/g/n/ac


### AP7030DE Antenna Pattern Plots

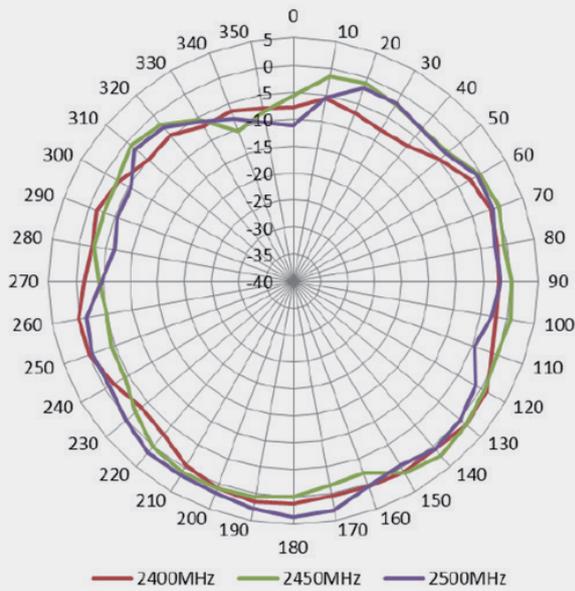


2.4G (PHI=0)

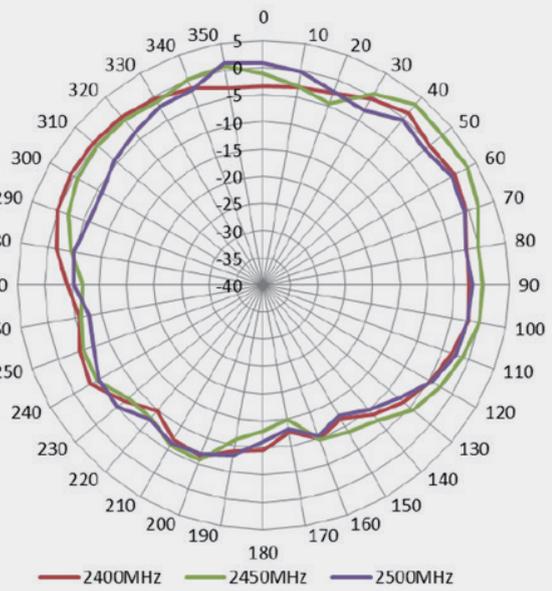

2.4G (PHI=90)

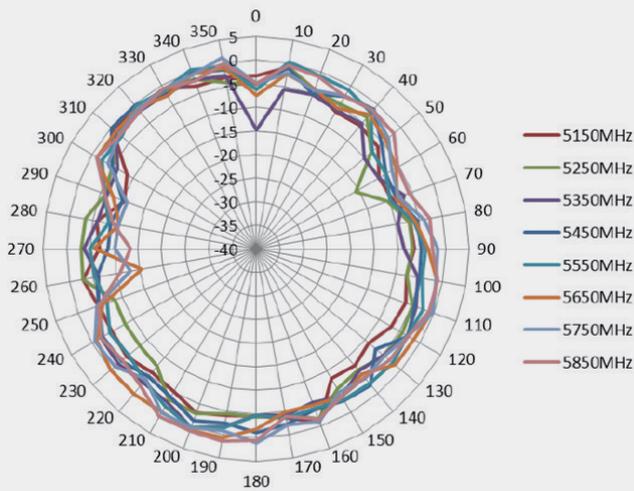

5G (PHI=0)

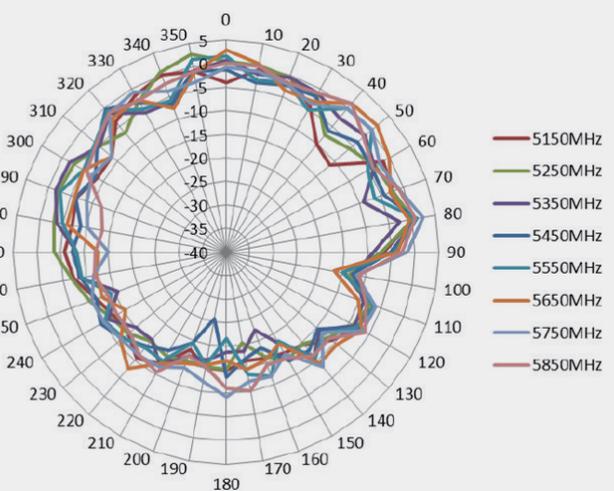

5G (PHI=90)

## Ordering Information

Component	Part Description	Configuration Description	Remarks
AP			
AP7030DE	Assembling Components,AP7030DE,AP7030DE Mainframe(11ac,Smart AP Indoor,3x3 Double Frequency,Built-in Smart Antenna,Up to 1.9Gbps data rate,No AC/DC adapter)	The mounting bracket is included in the standard configuration.	The standard configuration does not include the network cable and power supply.
Power Adapter			
220 V to 12 V power adapter	AC/DC Adapter--5degC-45degC-90V-270V-12V/2A-Europe Standard-DC inlet	European standard	Sold only on markets outside China.
220 V to 12 V power adapter	AC/DC Adapter--5degC-45degC-90V-270V-12V/2A-UK Standard-DC inlet	UK standard	Sold only on markets outside China.
220 V to 12 V power adapter	AC/DC Adapter--5degC-45degC-90V-270V-12V/2A-Australia Standard-DC inlet	Australian standard	Sold only on markets outside China.
220 V to 12 V power adapter	Adapter--5degC-45degC-90V-270V-12V/2A-Brazil Standard-DC inlet	Brazilian standard	Sold only on markets outside China.
220 V to 12 V power adapter	Adapter,-5degC,45degC,90V,270V,12V/2A,US Standard/DC inlet	US standard	Sold only on markets outside China.

### Professional Service and Support

Huawei WLAN planning tools deliver expert network design and optimization services using the most professional simulation platform in the industry. Backed by fifteen years of continuous investment in wireless technologies, extensive network planning and optimization experience, and rich expert resources, Huawei helps customers:

- Design, deploy, and operate a high-performance network that is reliable and secure.
- Maximize return on investment and reduce operating expenses.

### More Information

For more information, please visit <http://e.huawei.com/en/> or contact your local Huawei office.



Enterprise Services



Product Overview



Marketing Documentation

**Copyright © Huawei Technologies Co., Ltd. 2016. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

**Trademark Notice**

 , HUAWEI, and  are trademarks or registered trademarks of Huawei Technologies Co., Ltd. Other trademarks, product, service and company names mentioned are the property of their respective owners.

**General Disclaimer**

The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Huawei may change the information at any time without notice.

HUAWEI TECHNOLOGIES CO.,LTD.  
Huawei Industrial Base  
Bantian Longgang  
Shenzhen 518129,P.R.China  
Tel: +86 755 28780808

[www.huawei.com](http://www.huawei.com)